


Ordinary Thinking

Objective Questions


Static and limiting friction

- The coefficient of friction μ and the angle of friction λ are related as
 - $\sin \lambda = \mu$
 - $\cos \lambda = \mu$
 - $\tan \lambda = \mu$
 - $\tan \mu = \lambda$
- A force of 98 N is required to just start moving a body of mass 100 kg over ice. The coefficient of static friction is
 - 0.6
 - 0.4
 - 0.2
 - 0.1
- A block weighs W is held against a vertical wall by applying a horizontal force F . The minimum value of F needed to hold the block is [MP PMT 1993]
 - Less than W
 - Equal to W
 - Greater than W
 - Data is insufficient
- The maximum static frictional force is
 - Equal to twice the area of surface in contact
 - Independent of the area of surface in contact
 - Equal to the area of surface in contact
 - None of the above
- Maximum value of static friction is called [BHU 1995; RPET 2000]
 - Limiting friction
 - Rolling friction
 - Normal reaction
 - Coefficient of friction
- Pulling force making an angle θ to the horizontal is applied on a block of weight W placed on a horizontal table. If the angle of friction is α , then the magnitude of force required to move the body is equal to [EAMCET 1987]
 - $\frac{W \sin \alpha}{g \tan(\theta - \alpha)}$
 - $\frac{W \cos \alpha}{\cos(\theta - \alpha)}$
 - $\frac{W \sin \alpha}{\cos(\theta - \alpha)}$
 - $\frac{W \tan \alpha}{\sin(\theta - \alpha)}$

- In the figure shown, a block of weight 10 N resting on a horizontal surface. The coefficient of static friction between the block and the surface $\mu_s = 0.4$. A force of 3.5 N will keep the block in uniform motion, once it has been set in motion. A horizontal force of 3 N is applied to the block, then the block will
 - Move over the surface with constant velocity
 - Move having accelerated motion over the surface
 - Not move
 - First it will move with a constant velocity for some time and then will have accelerated motion



- Two masses A and B of 10 kg and 5 kg respectively are connected with a string passing over a frictionless pulley fixed at the corner of a table as shown. The coefficient of static friction of A with table is 0.2 . The minimum mass of C that may be placed on A to prevent it from moving is [MP PET 1984]
 - 15 kg
 - 10 kg
 - 5 kg
 - 12 kg

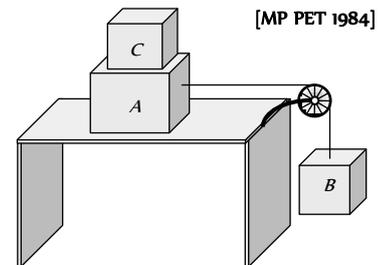

- The limiting friction is
 - Always greater than the dynamic friction
 - Always less than the dynamic friction
 - Equal to the dynamic friction
 - Sometimes greater and sometimes less than the dynamic friction
- Which is a suitable method to decrease friction
 - Ball and bearings
 - Lubrication
 - Polishing
 - All the above

11. A uniform rope of length l lies on a table. If the coefficient of friction is μ , then the maximum length l_1 of the part of this rope which can overhang from the edge of the table without sliding down is [DPMT 2001]

- (a) $\frac{l}{\mu}$ (b) $\frac{l}{\mu+1}$
 (c) $\frac{\mu l}{1+\mu}$ (d) $\frac{\mu l}{\mu-1}$

12. Which of the following statements is not true [CMC Vellore 1989]

- (a) The coefficient of friction between two surfaces increases as the surface in contact are made rough
 (b) The force of friction acts in a direction opposite to the applied force
 (c) Rolling friction is greater than sliding friction
 (d) The coefficient of friction between wood and wood is less than 1

13. A block of 1 kg is stopped against a wall by applying a force F perpendicular to the wall. If $\mu = 0.2$ then minimum value of F will be [MP PMT 2003]


- (a) 980 N (b) 49 N
 (c) 98 N (d) 490 N

14. A heavy uniform chain lies on a horizontal table-top. If the coefficient of friction between the chain and table surface is 0.25, then the maximum fraction of length of the chain, that can hang over one edge of the table is [CBSE PMT 1990]

- (a) 20% (b) 25%
 (c) 35% (d) 15%

15. The blocks A and B are arranged as shown in the figure. The pulley is frictionless. The mass of A is 10 kg. The coefficient of friction of A with the horizontal surface is 0.20. The minimum mass of B to start the motion will be

[MP PET 1994]

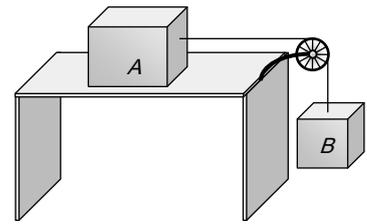

- (a) 2 kg
 (b) 0.2 kg
 (c) 5 kg
 (d) 10 kg

16. Work done by a frictional force is

- (a) Negative (b) Positive
 (c) Zero (d) All of the above

17. A uniform chain of length L changes partly from a table which is kept in equilibrium by friction. The maximum length that can withstand without slipping is l , then coefficient of friction between the table and the chain is [EAMCET (Engg.) 1995]

- (a) $\frac{l}{L}$ (b) $\frac{l}{L+l}$
 (c) $\frac{l}{L-l}$ (d) $\frac{L}{L+l}$


18. When two surfaces are coated with a lubricant, then they [AFMC 1998, 99; AIIMS 2001]

- (a) Stick to each other (b) Slide upon each other
 (c) Roll upon each other (d) None of these

19. A 20 kg block is initially at rest on a rough horizontal surface. A horizontal force of 75 N is required to set the block in motion. After it is in motion, a horizontal force of 60 N is required to keep the block moving with constant speed. The coefficient of static friction is [AMU 1999]

- (a) 0.38 (b) 0.44
 (c) 0.52 (d) 0.60

20. A block A with mass 100 kg is resting on another block B of mass 200 kg. As shown in figure a horizontal rope tied to a wall holds it. The coefficient of friction between A and B is 0.2 while coefficient of friction between B and the ground is 0.3. The minimum required force F to start moving B will be



[RPET 1999]

- (a) 900 N
 (b) 100 N
 (c) 1100 N
 (d) 1200 N


21. To avoid slipping while walking on ice, one should take smaller steps because of the [BHU 1999; BCECE 2004]

- (a) Friction of ice is large
 (b) Larger normal reaction
 (c) Friction of ice is small
 (d) Smaller normal reaction

22. A box is lying on an inclined plane what is the coefficient of static friction if the box starts sliding when an angle of inclination is 60° [KCET 2000]

- (a) 1.173 (b) 1.732
 (c) 2.732 (d) 1.677

23. A block of mass 2 kg is kept on the floor. The coefficient of static friction is 0.4. If a force F of 2.5 Newtons is applied on the block as shown in the figure, the frictional force between the block and the floor will be



- (a) 2.5 N
 (b) 5 N
 (c) 7.84 N
 (d) 10 N

24. Which one of the following is not used to reduce friction

[Kerala (Engg.) 2001]

- (a) Oil (b) Ball bearings
 (c) Sand (d) Graphite

25. If a ladder weighing 250N is placed against a smooth vertical wall having coefficient of friction between it and floor is 0.3, then what is the maximum force of friction available at the point of contact between the ladder and the floor [AIIMS 2002]

- (a) 75 N (b) 50 N

(c) 35 N


(d) 25 N

26. A body of mass 2 kg is kept by pressing to a vertical wall by a force of 100 N. The coefficient of friction between wall and body is 0.3. Then the frictional force is equal to

[Orissa JEE 2003]

- (a) 6 N (b) 20 N
 (c) 600 N (d) 700 N

27. A horizontal force of 10 N is necessary to just hold a block stationary against a wall. The coefficient of friction between the block and the wall is 0.2. the weight of the block is




[AIEEE 2003]

- (a) 2 N
 (b) 20 N
 (c) 50 N
 (d) 100 N

28. The coefficient of static friction, μ_s , between block A of mass 2 kg and the table as shown in the figure is 0.2.

What would be the maximum mass value of block B so that the two blocks do not move? The string and the pulley are assumed to be smooth and massless. [MP PET 2000]


($g = 10 \text{ m/s}^2$)

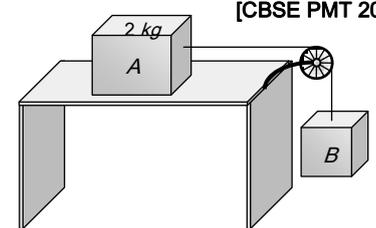

[CBSE PMT 2004]

- (a) 2.0 kg
 (b) 4.0 kg
 (c) 0.2 kg
 (d) 0.4 kg

29. If mass of $A = 10 \text{ kg}$, coefficient of static friction = 0.2, coefficient of kinetic friction = 0.2. Then mass of B to start motion is

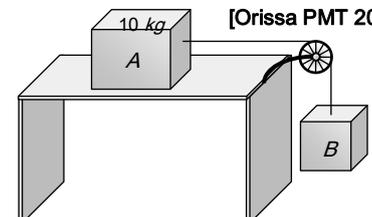

[Orissa PMT 2004]

- (a) 2 kg

240 Friction

- (b) 2.2 kg
(c) 4.8 kg
(d) 200 gm

30. A uniform metal chain is placed on a rough table such that one end of chain hangs down over the edge of the table. When one-third of its length hangs over the edge, the chain starts sliding. Then, the coefficient of static friction is

[Kerala PET 2005]

- (a) $\frac{3}{4}$ (b) $\frac{1}{4}$
(c) $\frac{2}{3}$ (d) $\frac{1}{2}$

31. A lift is moving downwards with an acceleration equal to acceleration due to gravity. A body of mass m kept on the floor of the lift is pulled horizontally. If the coefficient of friction is μ , then the frictional resistance offered by the body is

[DPMT 2004]

- (a) mg (b) μmg
(c) $2\mu mg$ (d) Zero

32. If a ladder weighing 250 N is placed against a smooth vertical wall having coefficient of friction between it and floor is 0.3, then what is the maximum force of friction available at the point of contact between the ladder and the floor

[BHU 2004]

- (a) 75 N (b) 50 N
(c) 35 N (d) 25 N

Kinetic Friction

1. Which one of the following statements is correct
(a) Rolling friction is greater than sliding friction
(b) Rolling friction is less than sliding friction
(c) Rolling friction is equal to sliding friction
(d) Rolling friction and sliding friction are same
2. The maximum speed that can be achieved without skidding by a car on a circular unbanked road of radius R and coefficient of static friction μ , is

- (a) μRg (b) $Rg\sqrt{\mu}$

- (c) $\mu\sqrt{Rg}$ (d) $\sqrt{\mu Rg}$

3. A car is moving along a straight horizontal road with a speed v_0 . If the coefficient of friction between the tyres and the road is μ , the shortest distance in which the car can be stopped is

[MP PET 1985; BHU 2002]

- (a) $\frac{v_0^2}{2\mu g}$ (b) $\frac{v_0}{\mu g}$
(c) $\left(\frac{v_0}{\mu g}\right)^2$ (d) $\frac{v_0}{\mu}$

4. A block of mass 5 kg is on a rough horizontal surface and is at rest. Now a force of 24 N is imparted to it with negligible impulse. If the coefficient of kinetic friction is 0.4 and $g = 9.8 \text{ m/s}^2$, then the acceleration of the block is

- (a) 0.26 m/s^2 (b) 0.39 m/s^2
(c) 0.69 m/s^2 (d) 0.88 m/s^2

5. A body of mass 2 kg is being dragged with uniform velocity of 2 m/s on a rough horizontal plane. The coefficient of friction between the body and the surface is 0.20. The amount of heat generated in 5 sec is


($J = 4.2 \text{ joule/cal}$ and $g = 9.8 \text{ m/s}^2$)

[MH CET (Med.) 2001]

- (a) 9.33 cal (b) 10.21 cal
(c) 12.67 cal (d) 13.34 cal

6. Two carts of masses 200 kg and 300 kg on horizontal rails are pushed apart. Suppose the coefficient of friction between the carts and the rails are same. If the 200 kg cart travels a distance of 36 m and stops, then the distance travelled by the cart weighing 300 kg is

[CPMT 1989; DPMT 2002]



- (a) 32 m (b) 24 m
(c) 16 m (d) 12 m

7. [INERT 1990] A body B lies on a smooth horizontal table and another body A is placed on B. The coefficient of friction between

- A and B is μ . What acceleration given to B will cause slipping to occur between A and B
- (a) μg (b) g / μ
 (c) μ / g (d) $\sqrt{\mu g}$
8. A 60 kg body is pushed with just enough force to start it moving across a floor and the same force continues to act afterwards. The coefficient of static friction and sliding friction are 0.5 and 0.4 respectively. The acceleration of the body is
- (a) 6 m/s^2 (b) 4.9 m/s^2
 (c) 3.92 m/s^2 (d) 1 m/s^2
9. A car turns a corner on a slippery road at a constant speed of 10 m/s . If the coefficient of friction is 0.5 , the minimum radius of the arc in meter in which the car turns is
- (a) 20 (b) 10
 (c) 5 (d) 4
10. A motorcyclist of mass m is to negotiate a curve of radius r with a speed v . The minimum value of the coefficient of friction so that this negotiation may take place safely, is
- [Haryana CEE 1996]
- (a) $v^2 r g$ (b) $\frac{v^2}{g r}$
 (c) $\frac{g r}{v^2}$ (d) $\frac{g}{v^2 r}$
11. On a rough horizontal surface, a body of mass 2 kg is given a velocity of 10 m/s . If the coefficient of friction is 0.2 and $g = 10 \text{ m/s}^2$, the body will stop after covering a distance of
- [MP PMT 1999]
- (a) 10 m (b) 25 m
 (c) 50 m (d) 250 m
12. A block of mass 50 kg can slide on a rough horizontal surface. The coefficient of friction between the block and the surface is 0.6 . The least force of pull acting at an angle of 30° to the upward drawn vertical which causes the block to just slide is
- [ISM Dhanbad 1994]
- (a) 29.43 N (b) 219.6 N
 (c) 21.96 N (d) 294.3 N
13. A body of 10 kg is acted by a force of 129.4 N if $g = 9.8 \text{ m/sec}^2$. The acceleration of the block is 10 m/s^2 . What is the coefficient of kinetic friction [EAMCET 1994]
- (a) 0.03 (b) 0.01
 (c) 0.30 (d) 0.25
14. Assuming the coefficient of friction between the road and tyres of a car to be 0.5 , the maximum speed with which the car can move round a curve of 40.0 m radius without slipping, if the road is unbanked, should be
- [AMU 1995]
- (a) 25 m/s (b) 19 m/s
 (c) 14 m/s (d) 11 m/s
15. Consider a car moving along a straight horizontal road with a speed of 72 km/h . If the coefficient of kinetic friction between the tyres and the road is 0.5 , the shortest distance in which the car can be stopped is [$g = 10 \text{ ms}^{-2}$]
- [CBSE PMT 1992]
- (a) 30 m (b) 40 m
 (c) 72 m (d) 20 m
16. A 500 kg horse pulls a cart of mass 1500 kg along a level road with an acceleration of 1 ms^{-2} . If the coefficient of sliding friction is 0.2 , then the force exerted by the horse in forward direction is
- [SCRA 1998]
- (a) 3000 N (b) 4000 N
 (c) 5000 N (d) 6000 N
17. The maximum speed of a car on a road turn of radius 30 m , if the coefficient of friction between the tyres and the road is 0.4 ; will be
- [MH CET (Med.) 1999]
- (a) 9.84 m/s (b) 10.84 m/s
 (c) 7.84 m/s (d) 5.84 m/s

242 Friction

18. A block of mass 50 kg slides over a horizontal distance of 1 m . If the coefficient of friction between their surfaces is 0.2 , then work done against friction is
[BHU 2001; CBSE PMT 1999, 2000; AIIMS 2000]
 (a) 98 J (b) 72 J
 (c) 56 J (d) 34 J
19. On the horizontal surface of a truck ($\mu = 0.6$), a block of mass 1 kg is placed. If the truck is accelerating at the rate of 5 m/sec^2 then frictional force on the block will be
[CBSE PMT 2001]
 (a) 5 N (b) 6 N
 (c) 5.88 N (d) 8 N
20. A vehicle of mass m is moving on a rough horizontal road with momentum P . If the coefficient of friction between the tyres and the road be μ , then the stopping distance is
[CBSE PMT 2001]
 (a) $\frac{P}{2\mu m g}$ (b) $\frac{P^2}{2\mu m g}$
 (c) $\frac{P}{2\mu m^2 g}$ (d) $\frac{P^2}{2\mu m^2 g}$
21. A body of weight 64 N is pushed with just enough force to start it moving across a horizontal floor and the same force continues to act afterwards. If the coefficients of static and dynamic friction are 0.6 and 0.4 respectively, the acceleration of the body will be (Acceleration due to gravity = g)
[EAMCET 2001]
 (a) $\frac{g}{6.4}$ (b) $0.64 g$
 (c) $\frac{g}{32}$ (d) $0.2 g$
22. When a body is moving on a surface, the force of friction is called
[MP PET 2002]
 (a) Static friction (b) Dynamic friction
 (c) Limiting friction (d) Rolling friction
23. A block of mass 10 kg is placed on a rough horizontal surface having coefficient of friction $\mu = 0.5$. If a horizontal force of 100 N is acting on it, then acceleration of the block will be
[AIIMS 2002]
 (a) 0.5 m/s^2 (b) 5 m/s^2
 (c) 10 m/s^2 (d) 15 m/s^2
24. It is easier to roll a barrel than pull it along the road. This statement is
[BVP 2003]
 (a) False (b) True
 (c) Uncertain (d) Not possible
25. A marble block of mass 2 kg lying on ice when given a velocity of 6 m/s is stopped by friction in 10 s . Then the coefficient of friction is
[AIEEE 2003]
 (a) 0.01 (b) 0.02
 (c) 0.03 (d) 0.06
26. A horizontal force of 129.4 N is applied on a 10 kg block which rests on a horizontal surface. If the coefficient of friction is 0.3 , the acceleration should be
 (a) 9.8 m/s^2 (b) 10 m/s^2
 (c) 12.6 m/s^2 (d) 19.6 m/s^2
27. A 60 kg weight is dragged on a horizontal surface by a rope upto 2 metres . If coefficient of friction is $\mu = 0.5$, the angle of rope with the surface is 60° and $g = 9.8 \text{ m/sec}^2$, then work done is
[MP PET 1995]
 (a) 294 joules (b) 315 joules
 (c) 588 joules (d) 197 joules
28. A car having a mass of 1000 kg is moving at a speed of 30 metres/sec . Brakes are applied to bring the car to rest. If the frictional force between the tyres and the road surface is 5000 newtons , the car will come to rest in
[MP PMT 1995]
 (a) 5 seconds (b) 10 seconds
 (c) 12 seconds (d) 6 seconds
29. If μ_s, μ_k and μ_r are coefficients of static friction, sliding friction and rolling friction, then
[EAMCET (Engg.) 1995]
 (a) $\mu_s < \mu_k < \mu_r$ (b) $\mu_k < \mu_r < \mu_s$
 (c) $\mu_r < \mu_k < \mu_s$ (d) $\mu_r = \mu_k = \mu_s$

30. A body of mass 5 kg rests on a rough horizontal surface of coefficient of friction 0.2 . The body is pulled through a distance of 10 m by a horizontal force of 25 N . The kinetic energy acquired by it is ($g = 10\text{ m/s}^2$)

[EAMCET (Med.) 2000]

- (a) 330 J (b) 150 J
(c) 100 J (d) 50 J

31. A motorcycle is travelling on a curved track of radius 500 m . If the coefficient of friction between road and tyres is 0.5 , the speed avoiding skidding will be

- (a) 50 m/s (b) 75 m/s
(c) 25 m/s (d) 35 m/s

32. A fireman of mass 60 kg slides down a pole. He is pressing the pole with a force of 600 N . The coefficient of friction between the hands and the pole is 0.5 , with what acceleration will the fireman slide down ($g = 10\text{ m/s}^2$)


[Pb. PMT 2002]

- (a) 1 m/s^2 (b) 2.5 m/s^2
(c) 10 m/s^2 (d) 5 m/s^2

33. A block of mass $M = 5\text{ kg}$ is resting on a rough horizontal surface for which the coefficient of friction is 0.2 . When a force $F = 40\text{ N}$ is applied, the acceleration of the block will be ($g = 10\text{ m/s}^2$)

[MP PMT 2004]

- (a) 5.73 m/sec^2
(b) 8.0 m/sec^2
(c) 3.17 m/sec^2
(d) 10.0 m/sec^2

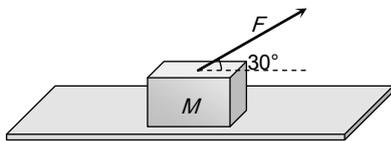

34. A body is moving along a rough horizontal surface with an initial velocity 6 m/s . If the body comes to rest after travelling 9 m , then the coefficient of sliding friction will be

[BCECE 2004]

- (a) 0.4 (b) 0.2

- (c) 0.6 (d) 0.8

35. Consider a car moving on a straight road with a speed of 100 m/s . The distance at which car can be stopped is ($\mu_k = 0.5$)

[AIIEE 2005]

- (a) 100 m (b) 400 m
(c) 800 m (d) 1000 m

36. A cylinder of 10 kg is sliding in a plane with an initial velocity of 10 m/s . If the coefficient of friction between the surface and cylinder is 0.5 then before stopping, it will travel ($g = 10\text{ m/s}^2$)

[Pb. PMT 2004]

- (a) 2.5 m (b) 5 m
(c) 7.5 m (d) 10 m

Motion on Inclined Surface

1. When a body is lying on a rough inclined plane and does not move, the force of friction

- (a) is equal to μR (b) is less than μR
(c) is greater than μR (d) is equal to R

2. When a body is placed on a rough plane inclined at an angle θ to the horizontal, its acceleration is

- (a) $g(\sin\theta - \cos\theta)$ (b) $g(\sin\theta - \mu\cos\theta)$
(c) $g(\mu\sin\theta - \cos\theta)$ (d) $g\mu(\sin\theta - \cos\theta)$

3. A block is at rest on an inclined plane making an angle α with the horizontal. As the angle α of the incline is increased, the block starts slipping when the angle of inclination becomes θ . The coefficient of static friction between the block and the surface of the inclined plane is or

A body starts sliding down at an angle θ to horizontal. Then coefficient of friction is equal to [CBSE PMT 1993]

- (a) $\sin\theta$ (b) $\cos\theta$
(c) $\tan\theta$ (d) Independent of θ

4. A given object takes n times as much time to slide down a 45° rough incline as it takes to slide down a perfectly

15. A body is sliding down an inclined plane having coefficient of friction 0.5. If the normal reaction is twice that of the resultant downward force along the incline, the angle between the inclined plane and the horizontal is
[EAMCET (Engg.) 2000]
- (a) 15° (b) 30°
(c) 45° (d) 60°
16. A body of mass 10 kg is lying on a rough plane inclined at an angle of 30° to the horizontal and the coefficient of friction is 0.5. the minimum force required to pull the body up the plane is
[JIPMER 2000]
- (a) 914 N (b) 91.4 N
(c) 9.14 N (d) 0.914 N
17. A block of mass 1 kg slides down on a rough inclined plane of inclination 60° starting from its top. If the coefficient of kinetic friction is 0.5 and length of the plane is 1 m , then work done against friction is (Take $g = 9.8\text{ m/s}^2$)
[AFMC 2000; KCET 2001]
- (a) 9.82 J (b) 4.94 J
(c) 2.45 J (d) 1.96 J
18. A block of mass 10 kg is placed on an inclined plane. When the angle of inclination is 30° , the block just begins to slide down the plane. The force of static friction is
[Kerala (Engg.) 2001]
- (a) 10 kg wt (b) 89 kg wt
(c) 49 kg wt (d) 5 kg wt
19. A body of 5 kg weight kept on a rough inclined plane of angle 30° starts sliding with a constant velocity. Then the coefficient of friction is (assume $g = 10\text{ m/s}^2$)
- (a) $1/\sqrt{3}$ (b) $2/\sqrt{3}$
(c) $\sqrt{3}$ (d) $2\sqrt{3}$
20. 300 Joule of work is done in sliding up a 2 kg block on an inclined plane to a height of 10 metres . Taking value of acceleration due to gravity ' g ' to be 10 m/s^2 , work done against friction is
[MP PMT 2002]
- (a) 100 J (b) 200 J
(c) 300 J (d) Zero
21. A 2 kg mass starts from rest on an inclined smooth surface with inclination 30° and length 2 m . How much will it travel before coming to rest on a frictional surface with frictional coefficient of 0.25
- (a) 4 m (b) 6 m
(c) 8 m (d) 2 m
22. A block rests on a rough inclined plane making an angle of 30° with the horizontal. The coefficient of static friction between the block and the plane is 0.8. If the frictional force on the block is 10 N , the mass of the block (in kg) is (take $g = 10\text{ m/s}^2$)
[AIEEE 2004]
- (a) 2.0 (b) 4.0
(c) 1.6 (d) 2.5
23. A body takes time t to reach the bottom of an inclined plane of angle θ with the horizontal. If the plane is made rough, time taken now is $2t$. The coefficient of friction of the rough surface is
- (a) $\frac{3}{4}\tan\theta$ (b) $\frac{2}{3}\tan\theta$
(c) $\frac{1}{4}\tan\theta$ (d) $\frac{1}{2}\tan\theta$
24. A block is kept on an inclined plane of inclination θ of length l . The velocity of particle at the bottom of inclined is (the coefficient of friction is μ)
- (a) $\sqrt{2gl(\mu\cos\theta - \sin\theta)}$ (b) $\sqrt{2g(\sin\theta - \mu\cos\theta)}$
(c) $\sqrt{2g(\sin\theta + \mu\cos\theta)}$ (d) $\sqrt{2g(\cos\theta + \mu\sin\theta)}$


Critical Thinking

[JIPMER 2002]

Objective Questions

1. A block of mass m lying on a rough horizontal plane is acted upon by a horizontal force P and another force Q inclined at an angle θ to the vertical. The block will remain in equilibrium, if the coefficient of friction between it and the surface is
[Haryana CEE 1996]

- (a) $\frac{(P + Q \sin \theta)}{(mg + Q \cos \theta)}$
- (b) $\frac{(P \cos \theta + Q)}{(mg - Q \sin \theta)}$
- (c) $\frac{(P + Q \cos \theta)}{(mg + Q \sin \theta)}$
- (d) $\frac{(P \sin \theta - Q)}{(mg - Q \cos \theta)}$

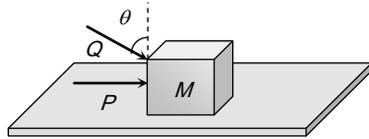

2. Which of the following is correct, when a person walks on a rough surface [IIT 1981]

- (a) The frictional force exerted by the surface keeps him moving
- (b) The force which the man exerts on the floor keeps him moving
- (c) The reaction of the force which the man exerts on floor keeps him moving
- (d) None of the above

3. A block of mass 0.1 kg is held against a wall by applying a horizontal force of 5 N on the block. If the coefficient of friction between the block and the wall is 0.5, the magnitude of the frictional force acting on the block is [IIT 1994] 7.

- (a) 2.5 N
- (b) 0.98 N
- (c) 4.9 N
- (d) 0.49 N


4. A body of mass M is kept on a rough horizontal surface (friction coefficient μ). A person is trying to pull the body by applying a horizontal force but the body is not moving. The force by the surface on the body is F , where

[MP PET 1997]

- (a) $F = Mg$
- (b) $F = \mu Mg$
- (c) $Mg \leq F \leq Mg\sqrt{1 + \mu^2}$
- (d) $Mg \geq F \geq Mg\sqrt{1 + \mu^2}$

5. What is the maximum value of the force F such that the block shown in the arrangement, does not move

[IIT-JEE Screening 2003]

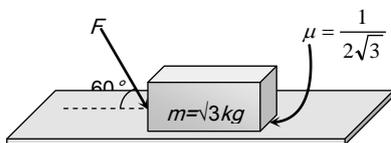


- (a) 20 N
- (b) 10 N
- (c) 12 N
- (d) 15 N

6. A block P of mass m is placed on a frictionless horizontal surface. Another block Q of same mass is kept on P and connected to the wall with the help of a spring of spring constant k as shown in the figure. μ_s is the coefficient of friction between P and Q . The blocks move together performing SHM of amplitude A . The maximum value of the friction force between P and Q is

[IIT-JEE (Screening) 2004]


- (a) kA
- (b) $\frac{kA}{2}$
- (c) Zero
- (d) $\mu_s mg$

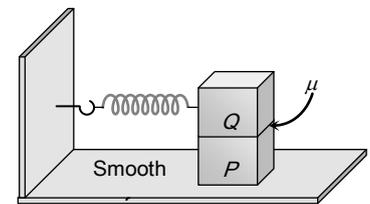

7. A body of mass m rests on horizontal surface. The coefficient of friction between the body and the surface is μ . If the mass is pulled by a force P as shown in the figure, the limiting friction between body and surface will be


[BHU 2004]

- (a) μmg
- (b) $\mu \left[mg + \left(\frac{P}{2} \right) \right]$
- (c) $\mu \left[mg - \left(\frac{P}{2} \right) \right]$
- (d) $\mu \left[mg - \left(\frac{\sqrt{3} P}{2} \right) \right]$



8. A 40 kg slab rests on a frictionless floor as shown in the figure. A 10 kg block rests on the top of the slab. The static coefficient of friction between the block and slab is 0.60 while the kinetic friction is 0.40. The 10 kg block is acted upon by a horizontal force 100 N. If $g = 9.8 \text{ m/s}^2$, the resulting acceleration of the slab will be [NCERT 1982]

- (a) 0.98 m/s^2
 (b) 1.47 m/s^2
 (c) 1.52 m/s^2
 (d) 6.1 m/s^2

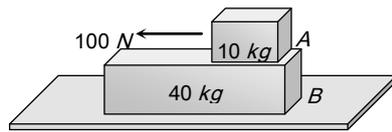

Read the assertion and reason carefully to mark the correct option out of the options given below:

- (a) *If both assertion and reason are true and the reason is the correct explanation of the assertion.*
 (b) *If both assertion and reason are true but reason is not the correct explanation of the assertion.*
 (c) *If assertion is true but reason is false.*
 (d) *If the assertion and reason both are false.*
 (e) *If assertion is false but reason is true.*

9. A block of mass 2 kg rests on a rough inclined plane making an angle of 30° with the horizontal. The coefficient of static friction between the block and the plane is 0.7 . The frictional force on the block is [IIT 1980; J & K CET 2004]

- (a) 9.8 N
 (b) $0.7 \times 9.8 \times \sqrt{3} \text{ N}$
 (c) $9.8 \times \sqrt{3} \text{ N}$
 (d) $0.8 \times 9.8 \text{ N}$

10. When a bicycle is in motion, the force of friction exerted by the ground on the two wheels is such that it acts


[IIT 1990; Manipal MEE 1995; MP PET 1996]

- (a) In the backward direction on the front wheel and in the forward direction on the rear wheel
 (b) In the forward direction on the front wheel and in the backward direction on the rear wheel
 (c) In the backward direction on both front and the rear wheels
 (d) In the forward direction on both front and the rear wheels

wheels

11. An insect crawls up a hemispherical surface very slowly (see the figure). The coefficient of friction between the insect and the surface is $1/3$. If the line joining the centre of the hemispherical surface to the insect makes an angle α with the vertical, the maximum possible value of α is given by [IIT-JEE 2001]

- (a) $\cot \alpha = 3$
 (b) $\tan \alpha = 3$
 (c) $\sec \alpha = 3$
 (d) $\text{cosec } \alpha = 3$



1. Assertion : On a rainy day, it is difficult to drive a car or bus at high speed.

Reason : The value of coefficient of friction is lowered due to wetting of the surface.

2. Assertion : When a bicycle is in motion, the force of friction exerted by the ground on the two wheels is always in forward direction.

Reason : The frictional force acts only when the bodies are in contact.

3. Assertion : Pulling a lawn roller is easier than pushing it.

Reason : Pushing increases the apparent weight and hence the force of friction.

4. Assertion : Angle of repose is equal to angle of limiting friction.

Reason : When the body is just at the point of motion, the force of friction in this stage is called as limiting friction.

5. Assertion : Two bodies of masses M and m ($M > m$) are allowed to fall from the same height if the air resistance for each be the same then both the bodies will reach the earth simultaneously.

Reason : For same air resistance, acceleration of both the bodies will be same.

6. Assertion : Friction is a self adjusting force.

248 Friction

Reason : Friction does not depend upon mass of the body.

7. Assertion : The value of dynamic friction is less than the limiting friction.

Reason : Once the motion has started, the inertia of rest has been overcome.

8. Assertion : The acceleration of a body down a rough inclined plane is greater than the acceleration due to gravity.

Reason : The body is able to slide on a inclined plane only when its acceleration is greater than acceleration due to gravity.

1	b	2	b	3	c	4	a	5	a
6	c	7	a	8	d	9	d	10	c
11	b	12	a	13	a	14	d	15	c
16	b	17	c	18	d	19	a	20	a
21	a	22	a	23	a	24	b		

Critical Thinking Questions

1	a	2	c	3	b	4	c	5	a
6	b	7	c	8	a	9	a	10	ac
11	a								

Assertion & Reason

1	a	2	e	3	a	4	b	5	d
6	d	7	a	8	d				

Answers

Static and Limiting Friction

1	c	2	d	3	c	4	b	5	a
6	c	7	c	8	a	9	a	10	d
11	c	12	c	13	b	14	a	15	a
16	d	17	c	18	b	19	a	20	c
21	c	22	b	23	a	24	c	25	a
26	b	27	a	28	d	29	a	30	d
31	d	32	a						


Kinetic Friction

1	b	2	d	3	a	4	d	5	a
6	c	7	a	8	d	9	a	10	b
11	b	12	d	13	c	14	c	15	b
16	d	17	b	18	a	19	a	20	d
21	d	22	b	23	b	24	b	25	d
26	b	27	b	28	d	29	c	30	b
31	a	32	d	33	a	34	b	35	d
36	d								


Motion on Inclined Surface

AS Answers and Solutions

Static and Limiting Friction

1. (c)
2. (d) $\mu = \frac{F}{R} = \frac{F}{mg} = \frac{98}{100 \times 9.8} = \frac{1}{10} = 0.1$
3. (c) Here applied horizontal force F acts as normal reaction.
For holding the block
Force of friction = Weight of block
 $f = W \Rightarrow \mu R = W \Rightarrow \mu F = W$
 $\Rightarrow F = \frac{W}{\mu}$
As $\mu < 1 \therefore F > W$
- 
4. (b)
5. (a)
6. (c)
7. (c) $F_l = \mu_s R = 0.4 \times mg = 0.4 \times 10 = 4N$ i.e. minimum 4N force is required to start the motion of a body. But applied force is only 3N. So the block will not move.
8. (a) For limiting condition $\mu = \frac{m_B}{m_A + m_C} \Rightarrow 0.2 = \frac{5}{10 + m_C}$
 $\Rightarrow 2 + 0.2m_C = 5 \Rightarrow m_C = 15kg$
9. (a)
10. (d) Ball and bearing produce rolling motion for which force of friction is low. Lubrication and polishing reduce roughness of surface.
11. (c) For given condition we can apply direct formula
 $l_1 = \left(\frac{\mu}{\mu + 1} \right) l$
12. (c) Sliding friction is greater than rolling friction.
13. (b) $F = \frac{W}{\mu} = \frac{1 \times 9.8}{0.2} = 49N$
14. (a) $l' = \left(\frac{\mu}{\mu + 1} \right) l = \left(\frac{0.25}{0.25 + 1} \right) l = \frac{l}{5} = 20\%$ of l
15. (a) $\mu = \frac{m_B}{m_A} \Rightarrow 0.2 = \frac{m_B}{10} \Rightarrow m_B = 2kg$
16. (d) Work done by friction can be positive, negative and zero depending upon the situation.
17. (c) $\mu = \frac{\text{Length of chain hanging from the table}}{\text{Length of chain lying on the table}} = \frac{l}{L - l}$

18. (b) Surfaces always slide over each other.
19. (a) Coefficient of friction $\mu_s = \frac{F_l}{R} = \frac{75}{mg} = \frac{75}{20 \times 9.8} = 0.38$
20. (c)



$$F = f_{AB} + f_{BG}$$

$$= \mu_{AB} m_A g + \mu_{BG} (m_A + m_B) g$$

$$= 0.2 \times 100 \times 10$$

$$+ 0.3(300) \times 10$$

$$= 200 + 900 = 1100 N$$

21. (c)
22. (b) $\mu = \tan(\text{Angle of repose}) = \tan 60^\circ = 1.732$
23. (a) Applied force = 2.5 N
Limiting friction = $\mu mg = 0.4 \times 2 \times 9.8 = 7.84 N$
For the given condition applied force is very smaller than limiting friction.
 \therefore Static friction on a body = Applied force = 2.5 N
24. (c) Sand is used to increase the friction.
25. (a) $F = \mu R = 0.3 \times 250 = 75 N$
26. (b) For the given condition, Static friction
= Applied force = Weight of body = $2 \times 10 = 20 N$
27. (a) $F = \frac{W}{\mu} \therefore W = \mu F = 0.2 \times 10 = 2N$
28. (d) $\mu_s = \frac{m_B}{m_A} \Rightarrow 0.2 = \frac{m_B}{2} \Rightarrow m_B = 0.4 kg$
29. (a) $\mu_s = \frac{m_B}{m_A} \Rightarrow 0.2 = \frac{m_B}{10} \Rightarrow m_B = 2 kg$
30. (d) $\mu_s = \frac{\text{Length of the chain hanging from the table}}{\text{Length of the chain lying on the table}}$
 $= \frac{l/3}{l - l/3} = \frac{l/3}{2l/3} = \frac{1}{2}$

31. (d)
32. (a)

Kinetic Friction

1. (b)
2. (d) In the given condition the required centripetal force is provided by frictional force between the road and tyre.
 $\frac{mv^2}{R} = \mu mg \therefore v = \sqrt{\mu Rg}$
3. (a) Retarding force $F = ma = \mu R = \mu mg \therefore a = \mu g$
Now from equation of motion $v^2 = u^2 - 2as$
 $\Rightarrow 0 = u^2 - 2as \Rightarrow s = \frac{u^2}{2a} = \frac{u^2}{2\mu g} \therefore = \frac{v_0^2}{2\mu g}$

4. (d) Net force = Applied force - Friction force
 $ma = 24 - \mu mg = 24 - 0.4 \times 5 \times 9.8 = 24 - 19.6$
 $\Rightarrow a = \frac{4.4}{5} = 0.88 \text{ m/s}^2$


5. (a) Work done = Force \times Displacement = $\mu mg \times (v \times t)$
 $W = (0.2) \times 2 \times 9.8 \times 2 \times 5 \text{ joule}$
 Heat generated $Q = \frac{W}{J} = \frac{0.2 \times 2 \times 9.8 \times 2 \times 5}{4.2} = 9.33 \text{ cal}$

6. (c) For given condition $s \propto \frac{1}{m^2} \therefore \frac{s_2}{s_1} = \left(\frac{m_1}{m_2}\right)^2 = \left(\frac{200}{300}\right)^2$
 $\Rightarrow s_2 = s_1 \times \frac{4}{9} = 36 \times \frac{4}{9} = 16 \text{ m}$

7. (a) There is no friction between the body B and surface of the table. If the body B is pulled with force F then
 $F = (m_A + m_B)a$

Due to this force upper body A will feel the pseudo force in a backward direction.

$f = m_A \times a$



But due to friction between A and B, body will not move. The body A will start moving when pseudo force is more than friction force.

i.e. for slipping, $m_A a = \mu m_A g \therefore a = \mu g$

8. (d) Limiting friction = $\mu_s R = \mu_s mg = 0.5 \times 60 \times 10 = 300 \text{ N}$
 Kinetic friction = $\mu_k R = \mu_k mg = 0.4 \times 60 \times 10 = 240 \text{ N}$
 Force applied on the body = 300 N and if the body is moving then, Net accelerating force
 = Applied force - Kinetic friction


$\Rightarrow ma = 300 - 240 = 60 \therefore a = \frac{60}{60} = 1 \text{ m/s}^2$

9. (a) $v = \sqrt{\mu g r} \Rightarrow r = \frac{v^2}{\mu g} = \frac{100}{0.5 \times 10} = 20$

10. (b)

11. (b) $S = \frac{u^2}{2\mu g} = \frac{(10)^2}{2 \times 0.2 \times 10} = 25 \text{ m}$

12. (d)

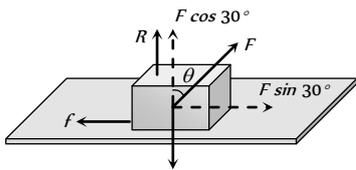

For limiting condition $f = \mu R$
 $F \sin 30^\circ = \mu(mg - F \cos 30^\circ)$, By solving $F = 294.3 \text{ N}$

13. (c) Net force on the body = Applied force - Friction
 $ma = F - \mu_k mg \Rightarrow \mu_k = \frac{F - ma}{mg} = \frac{129.4 - 10 \times 10}{10 \times 9.8} = 0.3$

14. (c) $v = \sqrt{\mu g r} = \sqrt{0.5 \times 9.8 \times 40} = \sqrt{196} = 14 \text{ m/s}$

15. (b) $s = \frac{u^2}{2\mu g} = \frac{(20)^2}{2 \times 0.5 \times 10} = 40 \text{ m}$

16. (d) Net force in forward direction = Accelerating force + Friction
 $= ma + \mu mg = m(a + \mu g) = (1500 + 500)(1 + 0.2 \times 10)$
 $= 2000 \times 3 = 6000 \text{ N}$

17. (b) $v = \sqrt{\mu g r} = \sqrt{0.4 \times 30 \times 9.8} = 10.84 \text{ m/s}$

18. (a) $W = \mu mg S = 0.2 \times 50 \times 9.8 \times 1 = 98 \text{ J}$

19. (a) $F_f = \mu mg = 0.6 \times 1 \times 9.8 = 5.88 \text{ N}$
 Pseudo force on the block = $ma = 1 \times 5 = 5 \text{ N}$

Pseudo is less than limiting friction hence static force of friction = 5 N.

20. (d) $S = \frac{u^2}{2\mu g} = \frac{m^2 u^2}{2\mu g m^2} = \frac{P^2}{2\mu m^2 g}$

21. (d) Weight of the body = 64 N
 so mass of the body $m = 6.4 \text{ kg}$, $\mu_s = 0.6$, $\mu_k = 0.4$

Net acceleration = $\frac{\text{Applied force} - \text{Kinetic friction}}{\text{Mass of the body}}$
 $= \frac{\mu_s mg - \mu_k mg}{m} = (\mu_s - \mu_k)g = (0.6 - 0.4)g = 0.2g$

22. (b)


23. (b) $a = \frac{\text{Applied force} - \text{Kinetic friction}}{\text{mass}}$
 $= \frac{100 - 0.5 \times 10 \times 10}{10} = 5 \text{ m/s}^2$

24. (b)

25. (d) $v = u - at \Rightarrow u - \mu g t = 0 \therefore \mu = \frac{u}{gt} = \frac{6}{10 \times 10} = 0.06$

26. (b) From the relation $F - \mu mg = ma$
 $a = \frac{F - \mu mg}{m} = \frac{129.4 - 0.3 \times 10 \times 9.8}{10} = 10 \text{ m/s}^2$

27. (b) Let body is dragged with force P, making an angle 60° with the horizontal.

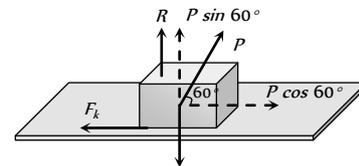

$F_k =$ Kinetic friction in the motion = $\mu_k R$
 From the figure $F_k = P \cos 60^\circ$ and $R = mg - P \sin 60^\circ$
 $\therefore P \cos 60^\circ = \mu_k (mg - P \sin 60^\circ)$

$\Rightarrow \frac{P}{2} = 0.5 \left(60 \times 10 - \frac{P\sqrt{3}}{2} \right) \Rightarrow P = 315.1 \text{ N}$

$\therefore F_k = P \cos 60^\circ = \frac{315.1}{2} \text{ N}$

Work done = $F_k \times s = \frac{315.1}{2} \times 2 = 315 \text{ Joule}$

28. (d) $v = u - at \Rightarrow t = \frac{u}{a}$ [As $v = 0$]

$$t = \frac{u \times m}{F} = \frac{30 \times 1000}{5000} = 6 \text{ sec}$$

29. (c)

30. (b) Kinetic energy acquired by body
 = (Total work done on the body) - (work against friction)
 = $F \times S - \mu mgS = 25 \times 10 - 0.2 \times 5 \times 10 \times 10$
 = $250 - 100 = 150 \text{ Joule}$


31. (a) $v = \sqrt{\mu rg} = \sqrt{0.5 \times 500 \times 10} = 50 \text{ m/s}$

32. (d) Net downward acceleration = $\frac{\text{Weight} - \text{Friction force}}{\text{Mass}}$


$$= \frac{(mg - \mu R)}{m}$$

$$= \frac{60 \times 10 - 0.5 \times 600}{60}$$

$$= \frac{300}{60} = 5 \text{ m/s}^2$$



33. (a)

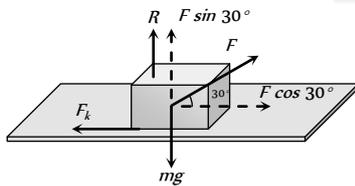

Kinetic friction = $\mu_k R = 0.2(mg - F \sin 30^\circ)$

$$= 0.2 \left(5 \times 10 - 40 \times \frac{1}{2} \right) = 0.2(50 - 20) = 6 \text{ N}$$

Acceleration of the block = $\frac{F \cos 30^\circ - \text{Kinetic friction}}{\text{Mass}}$

$$= \frac{40 \times \frac{\sqrt{3}}{2} - 6}{5} = 5.73 \text{ m/s}^2$$

34. (b) We know $s = \frac{u^2}{2\mu g}$ $\therefore \mu = \frac{u^2}{2gs} = \frac{(6)^2}{2 \times 10 \times 9} = 0.2$

35. (d) $s = \frac{u^2}{2\mu g} = \frac{(100)^2}{2 \times 0.5 \times 10} = 1000 \text{ m}$

36. (d) Kinetic energy of the cylinder will go against friction
 $\therefore \frac{1}{2}mv^2 = \mu mgs \Rightarrow s = \frac{u^2}{2\mu g} = \frac{(10)^2}{2 \times (0.5) \times 10} = 10 \text{ m}$

4. (a) $\mu = \tan \theta \left(1 - \frac{1}{n^2} \right) = 1 - \frac{1}{n^2}$ [As $\theta = 45^\circ$]

5. (a) Retardation in upward motion = $g(\sin \theta + \mu \cos \theta)$
 \therefore Force required just to move up $F_{up} = mg(\sin \theta + \mu \cos \theta)$

Similarly for down ward motion $a = g(\sin \theta - \mu \cos \theta)$

\therefore Force required just to prevent the body sliding down

$$F_{dn} = mg(\sin \theta - \mu \cos \theta)$$

According to problem $F_{up} = 2F_{dn}$

$$\Rightarrow mg(\sin \theta + \mu \cos \theta) = 2mg(\sin \theta - \mu \cos \theta)$$

$$\Rightarrow \sin \theta + \mu \cos \theta = 2 \sin \theta - 2\mu \cos \theta$$

$$\Rightarrow 3\mu \cos \theta = \sin \theta \Rightarrow \tan \theta = 3\mu$$

$$\Rightarrow \theta = \tan^{-1}(3\mu) = \tan^{-1}(3 \times 0.25) = \tan^{-1}(0.75) = 36.8^\circ$$

6. (c) $\mu = \tan \theta \left(1 - \frac{1}{n^2} \right)$

$\theta = 45^\circ$ and $n = 2$ (Given)


$$\therefore \mu = \tan 45^\circ \left(1 - \frac{1}{2^2} \right) = 1 - \frac{1}{4} = \frac{3}{4} = 0.75$$

7. (a) $a = g(\sin \theta - \mu \cos \theta) = 9.8(\sin 45^\circ - 0.5 \cos 45^\circ)$

$$= \frac{4.9}{\sqrt{2}} \text{ m/sec}^2$$

8. (d) Because if the angle of inclination is equal to or more than angle of repose then box will automatically slides down the plane.

9. (d)



Net force along the plane

$$= P - mg \sin \theta = 750 - 500 = 250 \text{ N}$$

Limiting friction = $F_l = \mu_s R = \mu_s mg \cos \theta$

$$= 0.4 \times 102 \times 9.8 \times \cos 30 = 346 \text{ N}$$

As net external force is less than limiting friction therefore friction on the body will be 250 N.

10. (c) $a = g(\sin \theta - \mu \cos \theta) = 10(\sin 60^\circ - 0.25 \cos 60^\circ)$

$$a = 7.4 \text{ m/s}^2$$

11. (b) $F_k = \mu_k R = \mu_k mg \cos \theta$

$$F_k = 1.7 \times 0.1 \times 10 \times \cos 30^\circ = 1.7 \times \frac{\sqrt{3}}{2} \text{ N}$$

12. (a) $\mu = \tan \theta \left(1 - \frac{1}{n^2} \right) = \tan 30 \left(1 - \frac{1}{2^2} \right) = \frac{\sqrt{3}}{4}$

13. (a) For angle of repose,
 Friction = Component of weight along the plane

Motion on Inclined Surface

1. (b) When the body is at rest then static friction works on it, which is less than limiting friction (μR).

2. (b)

3. (c) Coefficient of friction = Tangent of angle of repose

$$\therefore \mu = \tan \theta$$


$$= mg \sin \theta = 2 \times 9.8 \times \sin 45^\circ = 19.6 \sin 45^\circ$$

14. (d) For upper half

$$v^2 = u^2 + 2al/2 = 2(g \sin \theta)l/2 = gl \sin \theta$$

For lower half

$$\Rightarrow 0 = u^2 + 2g(\sin \theta - \mu \cos \theta) \frac{l}{2}$$



$$\Rightarrow -gl \sin \theta = gl(\sin \theta - \mu \cos \theta)$$

$$\Rightarrow \mu \cos \theta = 2 \sin \theta \Rightarrow \mu = 2 \tan \theta$$

15. (c) Resultant downward force along the incline

$$= mg(\sin \theta - \mu \cos \theta)$$

$$\text{Normal reaction} = mg \cos \theta$$

$$\text{Given: } mg \cos \theta = 2mg(\sin \theta - \mu \cos \theta)$$

$$\text{By solving } \theta = 45^\circ.$$

16. (b) $F = mg(\sin \theta + \mu \cos \theta)$

$$= 10 \times 9.8(\sin 30^\circ + 0.5 \cos 30^\circ) = 91.4 \text{ N.}$$

17. (c) $W = \mu mg \cos \theta S = 0.5 \times 1 \times 9.8 \times \frac{1}{2} \times 1 = 2.45 \text{ J}$


18. (d) $F = mg \sin 30^\circ = 50 \text{ N} = 5 \text{ kg} \cdot wt.$

19. (a) $\mu = \tan 30^\circ = \frac{1}{\sqrt{3}}.$

20. (a) Work done against gravity = $mgh = 2 \times 10 \times 10 = 200 \text{ J}$

$$\text{Work done against friction} = (\text{Total work done} - \text{work done against gravity}) = 300 - 200 = 100 \text{ J}$$

21. (a)

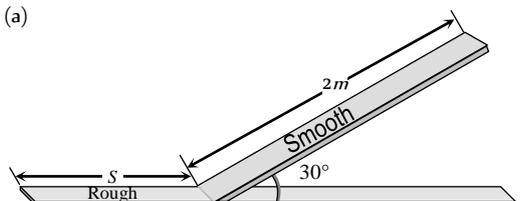

$$v^2 = u^2 + 2as = 0 + 2 \times g \sin 30^\circ \times 2 \Rightarrow v = \sqrt{20}$$

Let it travel distance 'S' before coming to rest

$$S = \frac{v^2}{2\mu g} = \frac{20}{2 \times 0.25 \times 10} = 4 \text{ m}$$

22. (a) Angle of repose $\alpha = \tan^{-1}(\mu) = \tan^{-1}(0.8) = 38.6^\circ$

Angle of inclined plane is given $\theta = 30^\circ$. It means block is at rest therefore,

Static friction = component of weight in downward direction

$$= mg \sin \theta = 10 \text{ N} \therefore m = \frac{10}{9 \times \sin 30^\circ} = 2 \text{ kg}$$

23. (a) $\mu = \tan \theta \left(1 - \frac{1}{n^2}\right) = \tan \theta \left(1 - \frac{1}{2^2}\right) = \frac{3}{4} \tan \theta$

24. (b) Acceleration (a) = $g(\sin \theta - \mu \cos \theta)$ and $s = l$

$$v = \sqrt{2as} = \sqrt{2gl(\sin \theta - \mu \cos \theta)}$$


Critical Thinking Questions

1. (a) By drawing the free body diagram of the block for critical condition

$$F = \mu R \Rightarrow P + Q \sin \theta$$

$$= \mu(mg + Q \cos \theta)$$

$$\therefore \mu = \frac{P + Q \sin \theta}{mg + Q \cos \theta}$$

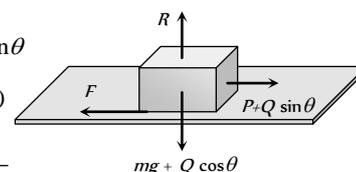

2. (c)


3. (b) Limiting friction

$$F_l = \mu_s R = 0.5 \times (5) = 2.5 \text{ N}$$

Since downward force is less than limiting friction therefore block is at rest so the static force of friction will work on it.

$$F_s = \text{downward force} = \text{Weight}$$

$$= 0.1 \times 9.8 = 0.98 \text{ N}$$



4. (c) Maximum force by surface when friction works


$$F = \sqrt{f^2 + R^2} = \sqrt{(\mu R)^2 + R^2} = R\sqrt{\mu^2 + 1}$$

Minimum force = R when there is no friction

Hence ranging from R to $R\sqrt{\mu^2 + 1}$

$$\text{We get, } Mg \leq F \leq Mg\sqrt{\mu^2 + 1}$$

5. (a)

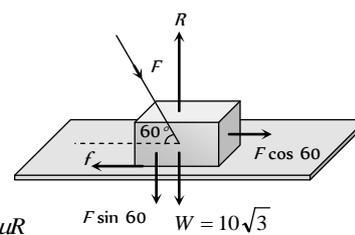

$$f = \mu R \quad F \sin 60^\circ \quad W = 10\sqrt{3}$$

$$F \cos 60^\circ = \mu(W + F \sin 60^\circ)$$

$$\text{Substituting } \mu = \frac{1}{2\sqrt{3}} \text{ \& } W = 10\sqrt{3} \text{ we get } F = 20 \text{ N}$$

6. (b) When two blocks performs simple harmonic motion together then at the extreme position (at amplitude = A)


$$\text{Restoring force } F = KA = 2ma \Rightarrow a = \frac{KA}{2m}$$

There will be no relative motion between P and Q if pseudo force on block P is less than or just equal to limiting friction between P and Q.

$$\text{i.e. } m \left(\frac{KA}{2m} \right) = \text{Limiting friction}$$

$$\therefore \text{Maximum friction} = \frac{KA}{2}$$

7. (c) Normal reaction $R = mg - P \sin 30^\circ = mg - \frac{P}{2}$

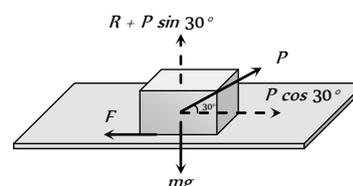

∴ Limiting friction between body and surface is given by,

$$F = \mu R = \mu \left(mg - \frac{P}{2} \right).$$

8. (a) Limiting friction between block and slab = $\mu_s m_A g$

$$= 0.6 \times 10 \times 9.8 = 58.8 \text{ N}$$

But applied force on block A is 100 N. So the block will slip over a slab.

Now kinetic friction works between block and slab

$$F_k = \mu_k m_A g = 0.4 \times 10 \times 9.8 = 39.2 \text{ N}$$

This kinetic friction helps to move the slab

$$\therefore \text{Acceleration of slab} = \frac{39.2}{m_B} = \frac{39.2}{40} = 0.98 \text{ m/s}^2$$

9. (a) Limiting friction $F_l = \mu mg \cos \theta$

$$F_l = 0.7 \times 2 \times 10 \times \cos 30^\circ = 12 \text{ N (approximately)}$$

But when the block is lying on the inclined plane then component of weight down the plane = $mg \sin \theta$

$$= 2 \times 9.8 \times \sin 30^\circ = 9.8 \text{ N}$$

It means the body is stationary, so static friction will work on it

∴ Static friction = Applied force = 9.8 N


10. (a,c) In cycling, the rear wheel moves by the force communicated to it by pedalling while front wheel moves by itself. So, while pedalling a bicycle, the force exerted by rear wheel on ground makes force of friction act on it in the forward direction (like walking). Front wheel moving by itself experience force of friction in backward direction (like rolling of a ball). [However, if pedalling is stopped both wheels move by themselves and so experience force of friction in backward direction].

11. (a)

Assertion & Reason

1. (a) On a rainy day, the roads are wet. Wetting of roads lowers the coefficient of friction between the tyres and the road. Therefore, grip of car on the road reduces and thus chances of skidding increases.
2. (e) When a bicycle is in motion, two cases may arise :
- (i) When the bicycle is being pedalled. In this case, the applied force has been communicated to rear wheel. Due to which the rear wheel pushes the earth backwards. Now the force of friction acts in the forward direction on the rear wheel but front wheel move forward due to inertia, so force of friction works on it in backward direction
- (ii) When the bicycle is not being pedalled :
- In this case both the wheels move in forward direction, due to inertia. Hence force of friction on both the wheels acts in backward direction.
3. (a) Suppose the roller is pushed as in figure (b). The force F is resolved into two components, horizontal component F_H which helps the roller to move forward, and the vertical component acting downwards adds to the weight. Thus weight is increased. But in the case of pull [fig (a)] the vertical component is

opposite to its weight. Thus weight is reduced. So pulling is easier than pushing the lawn roller.

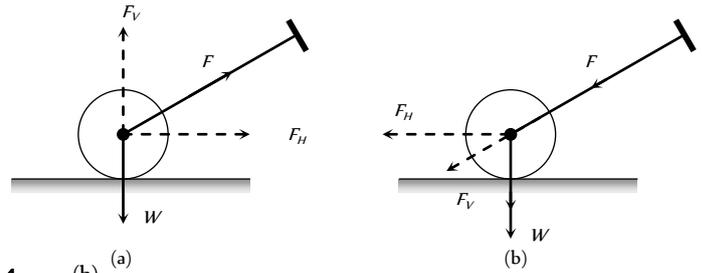

4. (b)
5. (d) The force acting on the body of mass M are its weight Mg acting vertically downwards and air resistance F acting vertically upward.




$$\therefore \text{Acceleration of the body, } a = \frac{Mg - F}{M} = g - \frac{F}{M}$$

Now, $M > m$, therefore, the body with larger mass will have greater acceleration and it will reach the ground first.

6. (d) Only static friction is a self adjusting force. This is because force of static friction is equal and opposite to applied force (so long as actual motion does not start). Frictional force = μmg i.e. friction depends on mass.
7. (a)
8. (d) Acceleration down a rough inclined plane
 $a = g(\sin \theta - \mu \cos \theta)$ and this is less than g .

Friction

SET Self Evaluation Test -5

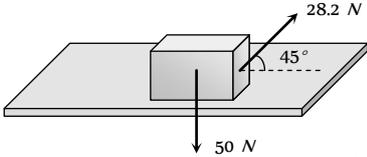1. A force of 19.6 N when applied parallel to the surface just moves a body of mass 10 kg kept on a horizontal surface. If a 5 kg mass is kept on the first mass, the force applied parallel to the surface to just move the combined body is
- (a) 29.4 N (b) 39.2 N
(c) 18.6 N (d) 42.6 N
2. If the normal force is doubled, the coefficient of friction is
- (a) Not changed (b) Halved
(c) Doubled (d) Tripled
3. A body of weight 50 N placed on a horizontal surface is just moved by a force of 28.2 N . The frictional force and the normal reaction are
- (a) $10\text{ N}, 15\text{ N}$
(b) $20\text{ N}, 30\text{ N}$
(c) $2\text{ N}, 3\text{ N}$
(d) $5\text{ N}, 6\text{ N}$
- 
4. Block A weighing 100 kg rests on a block B and is tied with a horizontal string to the wall at C. Block B weighs 200 kg . The coefficient of friction between A and B is 0.25 and between B and the surface is $1/3$. The horizontal force P necessary to move the block B should be ($g = 10\text{ m/s}^2$)
- (a) 1150 N
(b) 1250 N
(c) 1300 N
(d) 1420 N
- 
5. A rough vertical board has an acceleration a so that a 2 kg block pressing against it does not fall. The coefficient of friction between the block and the board should be
- (a) $> g/a$
(b) $< g/a$
(c) $= g/a$
(d) $> a/g$
- 
6. A stone weighing 1 kg and sliding on ice with a velocity of 2 m/s is stopped by friction in 10 sec . The force of friction (assuming it to be constant) will be
- (a) -20 N (b) -0.2 N
(c) 0.2 N (d) 20 N
7. A body of mass 10 kg slides along a rough horizontal surface. The coefficient of friction is $1/\sqrt{3}$. Taking $g = 10\text{ m/s}^2$, the least force which acts at an angle of 30° to the horizontal is
- (a) 25 N (b) 100 N
(c) 50 N (d) $\frac{50}{\sqrt{3}}\text{ N}$
8. A lift is moving downwards with an acceleration equal to acceleration due to gravity. A body of mass M kept on the floor of the lift is pulled horizontally. If the coefficient of friction is μ , then the frictional resistance offered by the body is
- (a) Mg (b) μMg
(c) $2\mu Mg$ (d) Zero
9. In the above question, if the lift is moving upwards with a uniform velocity, then the frictional resistance offered by the body is
- (a) Mg (b) μMg
(c) $2\mu Mg$ (d) Zero
10. A body of mass 2 kg is moving on the ground comes to rest after some time. The coefficient of kinetic friction between the body and the ground is 0.2 . The retardation in the body is
- (a) 9.8 m/s^2 (b) 4.73 m/s^2
(c) 2.16 m/s^2 (d) 1.96 m/s^2
11. A cyclist moves in a circular track of radius 100 m . If the coefficient of friction is 0.2 , then the maximum velocity with which the cyclist can take the turn with leaning inwards is
- (a) 9.8 m/s (b) 1.4 m/s
(c) 140 m/s (d) 14 m/s
12. A block of mass 5 kg lies on a rough horizontal table. A force of 19.6 N is enough to keep the body sliding at uniform velocity. The coefficient of sliding friction is
- (a) 0.5 (b) 0.2
(c) 0.4 (d) 0.8
13. A motor car has a width 1.1 m between wheels. Its centre of gravity is 0.62 m above the ground and the coefficient of friction between the wheels and the road is 0.8 . What is the maximum possible speed, if the centre of gravity inscribes a circle of radius 15 m ? (Road surface is horizontal)
- (a) 7.64 m/s (b) 6.28 m/s
(c) 10.84 m/s (d) 11.23 m/s
14. A child weighing 25 kg slides down a rope hanging from the branch of a tall tree. If the force of friction acting against him is 2 N , what is the acceleration of the child (Take $g = 9.8\text{ m/s}^2$)
- (a) 22.5 m/s^2 (b) 8 m/s^2
(c) 5 m/s^2 (d) 9.72 m/s^2


1. (a) $F_f \propto R \therefore F_f \propto m$ i.e. limiting friction depends upon the

mass of body. So, $\frac{(F_f)'}{F_f} = \frac{m'}{m} = \frac{10+5}{10}$

$\Rightarrow (F_f)' = \frac{3}{2} \times F_f = \frac{3}{2} \times 19.6 = 29.4 \text{ N}$

2. (a) Coefficient of friction is constant for two given surface in contact. It does not depend upon the weight or normal reaction.

3. (b)



Frictional force = $f = 28.2 \cos 45^\circ = 28.2 \times \frac{1}{\sqrt{2}} = 20 \text{ N}$

Normal reaction $R = 50 - 28.2 \sin 45^\circ = 30 \text{ N}$

4. (b) Friction between block A and block B & between block B and surface will oppose the P

$\therefore P = F_{AB} + F_{BS} = \mu_{AB} m_A g + \mu_{BS} (m_A + m_B) g$

$= 0.25 \times 100 \times 10 + \frac{1}{3} (100 + 200) \times 10 = 1250 \text{ N}$


5. (a) For the limiting condition upward friction force between board and block will balance the weight of the block.

i.e. $F > mg$

$\Rightarrow \mu(R) > mg$

$\Rightarrow \mu(ma) > mg$

$\Rightarrow \mu > \frac{g}{a}$



6. (b) $u = 2 \text{ m/s}, v = 0, t = 10 \text{ sec}$

$\therefore a = \frac{v-u}{t} = \frac{0-2}{10} = -\frac{2}{10} = -\frac{1}{5} = -0.2 \text{ m/s}^2$

\therefore Friction force = $ma = 1 \times (-0.2) = -0.2 \text{ N}$

7. (c) Let P force is acting at an angle 30° with the horizontal.

For the condition of motion $F = \mu R$

$P \cos 30^\circ = \mu(mg - P \sin 30^\circ)$

$\Rightarrow P \frac{\sqrt{3}}{2} = \frac{1}{\sqrt{3}} \left(100 - P \frac{1}{2} \right) \Rightarrow \frac{3P}{2} = \left(100 - \frac{P}{2} \right)$

$\Rightarrow 2P = 100 \therefore P = 50 \text{ N}$

8. (d) $R = m(g - a)$ for downward motion of lift

If $a = g$ then $R = 0 \therefore F = \mu R = 0$

9. (b) When the lift is moving upward with constant velocity then, $R = mg \therefore F = \mu R = \mu mg$

10. (d) We know that $a = \mu g = 0.2 \times 9.8 = 1.96 \text{ m/s}^2$

11. (d) $v = \sqrt{\mu r g} = \sqrt{0.2 \times 100 \times 10} = 10\sqrt{2} = 14 \text{ m/s}$

12. (c) $\mu_k = \frac{F}{R} = \frac{19.6}{5 \times 9.8} = \frac{2}{5} = 0.4$

13. (c) $v = \sqrt{\mu g r} = \sqrt{0.8 \times 9.8 \times 15} = 10.84 \text{ m/s}$

14. (d) Net downward force = Weight - Friction

$\therefore ma = 25 \times 9.8 - 2 \Rightarrow a = \frac{25 \times 9.8 - 2}{25} = 9.72 \text{ m/s}^2$